Corded Metal Track

Made-to-Measure Order Form



Company Name:	AC No.	Date:	Delivery Det	ails:
Contact Name:	Contact Email:			
Your Order Ref:	Contact Tel:			
Additional Order Info:				
Track Profile Colour	& Bracket Options			
28.0mm	21.4mm mm21	E I5mm		20.0mm 20.0mm
☐ Motiva Round	☐ Heavy Duty Corded	☐ W-Section	Corded	☐ Recess M-Section
■ BLACK	WHITE	☐ WHITE		WHITE
SILVER	☐ Ceiling Top Fix Bracket	☐ Ceiling Top Fix Bracket	B	
☐ Ceiling	☐ Ceiling Spring Loaded Bracket	Wall Fix 3cm L-Extension 6	Bracket	
☐ Wall Fix	☐ Wall Fix Spring Loaded Bracket	NOTE: For Wall Fix ar 3cm L-Extension Brad in addition to the Top	cket is required	
Wall-Fix Double Pole If you require a Double Pole	NOTE: For Wall Fix SurgeWave System an L-Extension bracket will be required to ensure the track is projected far enough for it to work. 9cm 14cm	If you require a Dou	uble Pole	
please complete a form for each pole – indicate relevant position with tick boxes shown here:	☐ Bracket Covers	pole – indicate rele with tick boxes sho	evant position own here:	
Front Back	Colour	☐ Front	Back	I

REN095-08-211





2 Number of brackets

Tables below show number of brackets provided and spacing cut off points. Additional Brackets are an optional extra.

Track Brackets Spacing break points for straight tracks										
100cm	150cm	200cm	250cm	300cm	350cm*	400cm*	450cm*	500cm*	550cm*	600cm*
3	4	5	6	7	8	9	10	11	12	13

Additional Brackets - Quantity... Type (if different)...

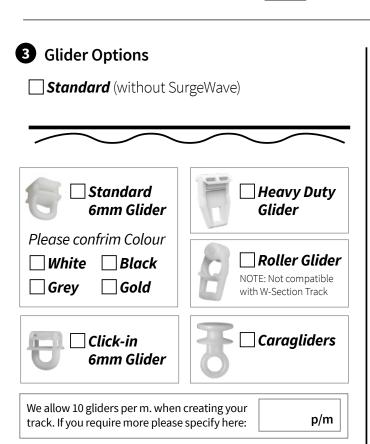

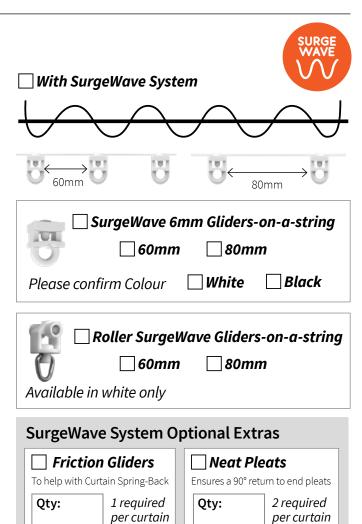

4 Finial Options Motiva Track only



__ Plastic End Cap



☐ Metal End Cap




☐ Metal Ball Finial

REN095-08-2109

Corded Metal Track Made-to	o-Measure Order Form	l		Renaissanc	
5 Straight Track size (for Bending	g/Bay Tracks please compl	ete Step ⑦)		
Single Track Length	mm Length include	es Finials	Length excludes Finial	s (Motiva only)	
Multiple Tracks Please complete	e Step 				
6 Number of Track Pieces for s	traight tracks 🗌 1-pie	ece Track	2-piece Track		
Please note: Any track over 3m in lengt	th will be supplied in 2 pieces	unless stated	l above!		
7 Bay window design [Please se	ee page 5 of this form to he	elp provide t	he correct measuren	nents]	
Bay Pole - No. of Bends	☐ Continuous	Curve	Returns - No. of Ben	ds	
Please note: The number of brackets p	rovided for bent tracks may v	ary from tho	se listed in the straight t	crack tables in 2	
8 Cording Option					
☐ Corded	Cord Drop	Confirm I	nstallation Height		
		track Insta	nfirm your proposed allation height here	cm	
	installati		tion height off your cord length Child Safety Regulations.		
Stacking Options					
☐ Split Pair	☐ Single Stack	r ed Left	☐ Single Stad	:ked Right	
(Not applicable for Single Stacked)	☐ Corded Left-hand Side	T	☐ Corded Right-hand Side		
‡ Note: Corded Both Sides will be	a 2 track colution				

* Note: Corded Both Sides will be a 2 track solution

One side will be the left-hand stack with cording left, the other side will be the right-hand stack with cording right. The 2 tracks will butt-up as close as possible to meet in the middle – but please be aware that there will be a gap.



OUR REF:

Corded Metal Track Made-to-Measure Order Form

OUR REF:



Multiple Track Detail	s & Labelling		
☐ Total No. of Tracks fol	lowing this spec		
☐ Track 1	cm	☐ Track 6	cm
☐ Track 2	cm	☐ Track 7	cm
☐ Track 3	cm	☐ Track 8	cm
☐ Track 4	cm	☐ Track 9	cm
☐ Track 5	cm	☐ Track 10	cm
		a valur andan	
rlease provide any addition	nal details that may assist ir	n your oraer:	
· <u>-</u>	<u>-</u>		


PAGE 4 OF 5



Projection Size:

Bending/Bay fitting required

Please complete the appropriate details below and include any additional drawings/photos that may help in the completion of your bending request. All measurements provided should be taken at the height the track will be fitted.

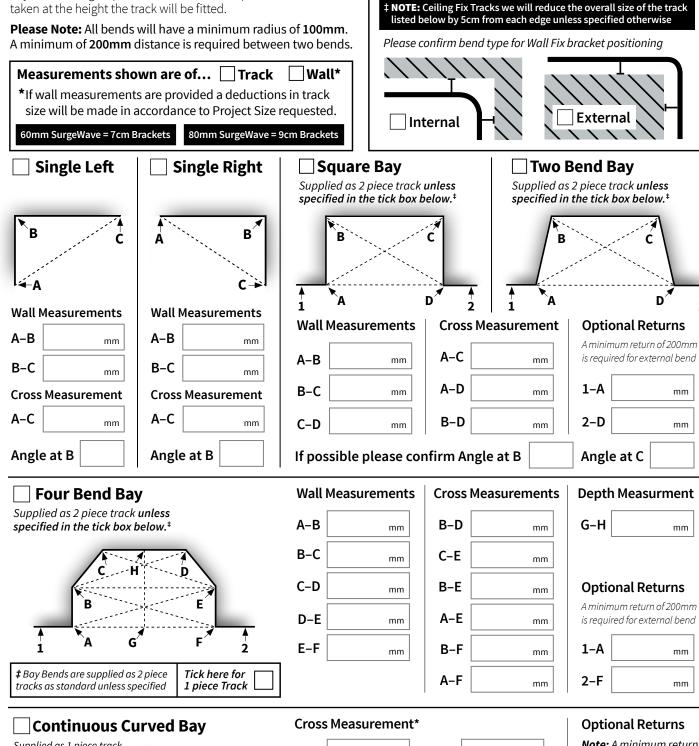


Bracket Type:

Ceiling Fix ‡

Wall Fix

Bracket Size:

Supplied as 1 piece track



A-B	mm	В-Е	
A-C	mm	C-E	
A-D	mm	D-E	
A-E	mm	C-F	

Note: A minimum return of 200mm is required

1-A	mm	
2-E	mm	

OUR REF:	TR
00111211	

ACK:

COL:

mm

mm

PAGE 1 OF 1

The distance between points A-B, B-C, C-D & D-E should be approximately equal. These points should be temporarily marked on the wall for accurate measuring.