


| 1 Track Type | For Double Pole please complete a form for | | | 1 |
|---------------|---|--------|--------|---|
| ☐ Single Pole | each pole and indicate relevant position with | Front | Back | |
| ☐ Double Pole | tick boxes shown here | 1 of 2 | 2 of 2 | |



2 Track Profile

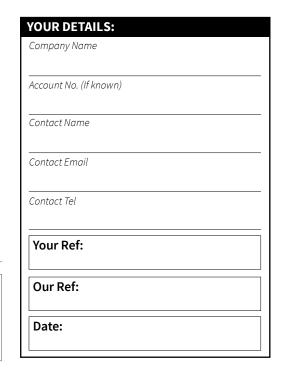


Distinction 20 (Uncorded only)




☐ Distinction 28 Uncorded



☐ Distinction 28 Corded



☐ Distinction 34 Uncorded



☐ Distinction 34 Corded

3 Track Colour





| Price Group 3 | |
|--|--|
| BESPOKE COLOUR We can match any specific RAL number and apply to all metal kit elements including brackets and finials. Please specifiy your RAL No. in box below. Min order of 10 tracks | |
| RAL No. | |

Please note that the following colours may incur a longer lead time of up to 10 days: Distinction 20 Tracks in Country Cream/Dove Grey/Light Grey. Distinction 34 Corded and Distinction 34 UncordedTracks in Country Cream/Antique Bronze/Californian Gold/Dove Grey/Light Grey.


| 4 Pole size – straight only (for Bay Poles or Continuous Curve tick here ☐ and please complete S | tep ①) |
|--|----------------|
|--|----------------|

| Total Tunal Lanath | | Length includes Finials | For exact finial dimensions see |
|--------------------|----|-------------------------|--------------------------------------|
| Total Track Length | cm | Length excludes Finials | illustrations shown in Step 6 |

Please note any track **over 600cm** in length will require a Connecting Bridge and Cover – these will be added as an additional cost to your order.


| OUR REF: |
|----------|
|----------|



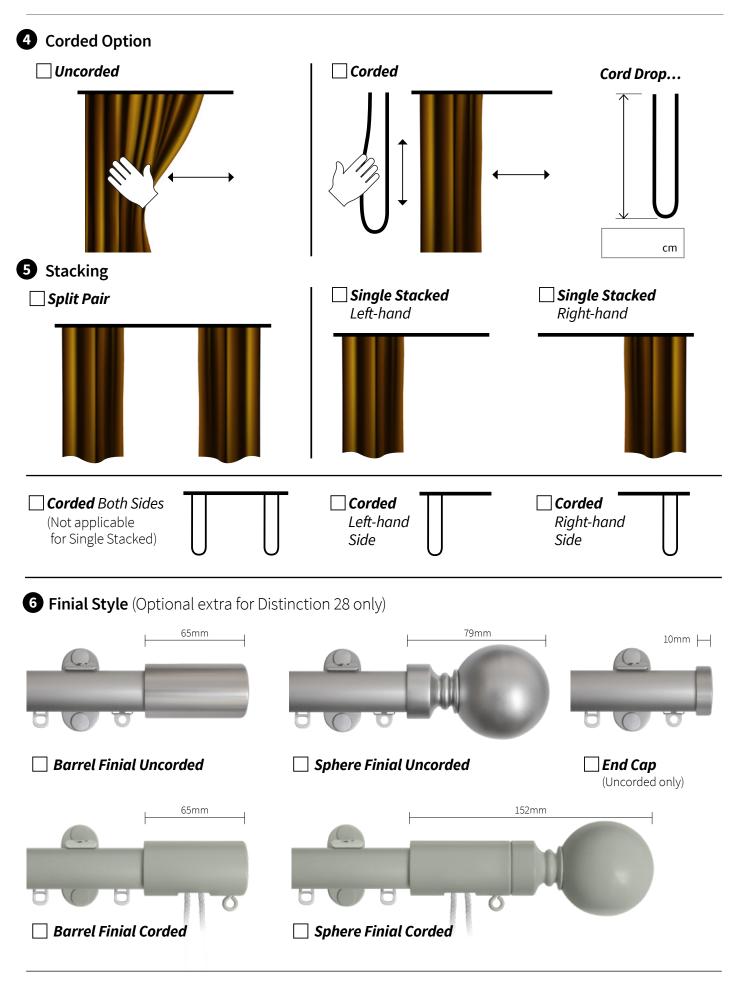

Distinction Track Made-to-Measure Order Form



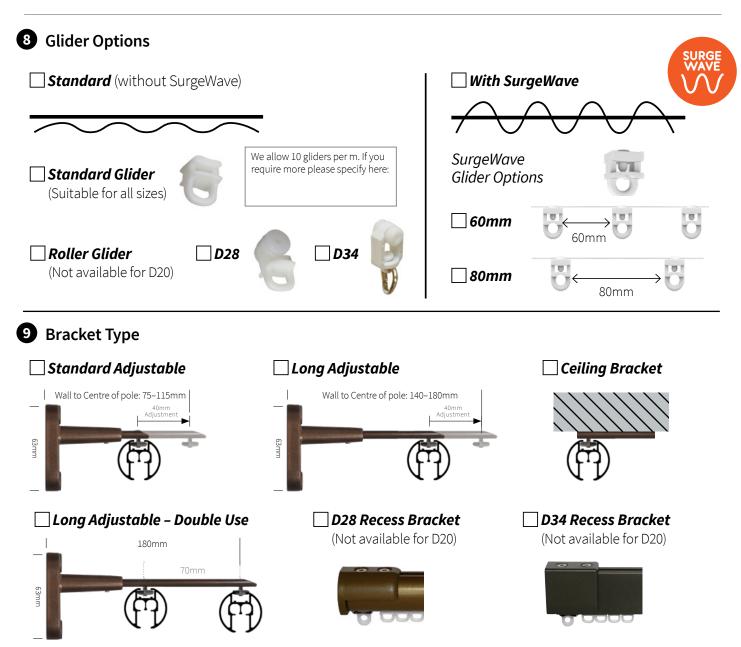

Number of brackets

OUR REF:

Tables below show number of brackets provided and spacing cut off points. Additional Brackets are an optional extra.

| Ceiling | Brackets | Spacing | break poi | nts for str | aight trac | cks | | | | |
|---------|----------|---------|-----------|-------------|------------|-------|-------|-------|-------|----|
| 125cm | 140cm | 200cm | 260cm | 320cm | 380cm | 440cm | 500cm | 560cm | 600cm | |
| 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 10 | Vν |

| Adjustal | ole Bracke | ets (all size | es) Spacin | g break po | ints for str | aight tracl | KS | |
|----------|------------|---------------|-------------------|------------|--------------|-------------|-------|--|
| 125cm | 170cm | 250cm | 330cm | 410cm | 490cm | 570cm | 600cm | |
| 2 | 3 | 4 | 5 | 6 | 7 | 8 | 8 | |

| Additional Brackets - Quantity | Type (if different) | |
|--------------------------------|---------------------|--|
| | | |

Distinction Track Made-to-Measure Order Form



| Bay Pole - No. of Bends | ☐ Continuous Curve | Returns - No. of Bends | |
|--------------------------------------|--|---|----------|
| lease note: The number of brackets p | provided for bent tracks may vary fron | n those listed in the straight track to | ables in |
| Please provide any additional detai | ils that may assist in your order: | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |


Distinction Track Made-to-Measure Order Form





Bending/Bay fitting required


Complete the details below and include any additional drawings/ photos that may help the completion of your bending request. All measurements should be taken at the height the track will be fitted.


| Bracket Type: Wall Fix Ceiling Fix | |
|---|--|
| Please confirm the required projection your track will be fitted from the wall/ceiling cm | |

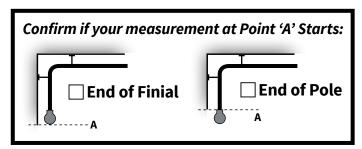





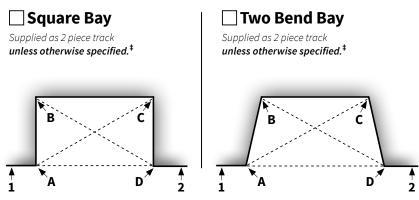

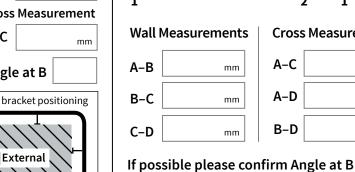







For 1 piece track

please tick here

* Square/Two Bend/Four Bend Bays supplied 2 piece tracks as standard unless otherwise specified.

Four Bend Bay

| Wall | Measurements |
|------|--------------|
| | |

A-B

G-H

mm

mm

mm

mm

mm

B-C mm C-D mm D-E mm E-F

Cross Measurement

B-D mm C-E mm B-E mm A-E mm B-F A-F mm

Optional Returns

A minimum return of 200mm is required for external bend


| 1-A | mm |
|-----|----|
| | |

mm

Continuous Curved Bay

Supplied as 1 piece track

Internal



Cross Measurement*

| A-B | mm | В-Е | mn |
|-----|----|-----|----|
| A-C | mm | C-E | mn |
| A-D | mm | D-E | mn |
| A-E | mm | C-F | mn |

Optional Returns

Note: A minimum return of 200mm is required

| 1-A | mm |
|-----|----|
| 2-E | mm |

^{*} The distance between points A-B, B-C, C-D & D-E should be approximately equal. These points should be temporarily marked on the wall for accurate measuring.